

SUPER GRIP CUT LEVEL 5 NITRILE GLOVE




- HPPE & FIBRE LINER
- 13G GAUGE
- SANDY NITRILE
- PALM DIP
- SPANDEX CUFF
- CUT LEVEL 5




MECHANICAL RISK PROFILE

The gloves performance against mechanical risk tests as stipulated by the EN388 standard.



SANDY NITRILE COATING PROPERTIES

Sandy nitrile is a synthetic rubber-like compound with sand particles. It has great flexibility and excellent abrasion resistance. Nitrile is resistant to the permeation of liquids and oils and offers superior grip in wet, dry & oily conditions.

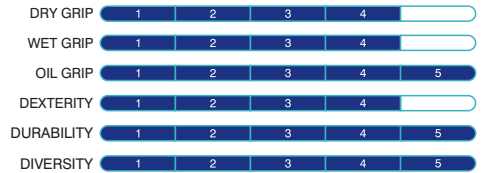

SPECIFICATIONS:

- ① Seamless 13g grey woven HPPE & fibre liner provides increased comfort, dexterity, breathability and protection assurance.
- ① Sandy nitrile palm coating provides a superior grip in wet, dry & oily conditions with a softer feel, excellent abrasion, cut, tear and penetration resistance.
- ① Excellent resistance to liquid & oil permeation.
- ① Knit wrist helps prevent dust & debris from entering the glove liner.
- ① Breathable back for comfort.
- ① Sizes: 7/S, 8/M, 9/L, 10/XL, 11/XXL

APPLICATIONS:

- ① Mechanical / Automotive
- ① Sanitation / Waste / Recycling
- ① Glass / Steel
- ① Paper Handling
- ① Sharp Object Handling
- ① Wood Working
- ① Construction

