

SUBMERSIBLE PUMP COMBOS

PAS4AG0209C • PAS4AG0212C • PAS4AG0215C



WATER PUMPS

The Pascali submersible borehole pump combo range covers a wide range of pumping duties for agricultural and domestic applications. Floating type impellers require less starting torque and are less affected by sand or other abrasive materials. All electrical connections have been connected for ease of installation. Stainless Steel outlet.

APPLICATION


- Water supply from wells & reservoirs
- Domestic use, civil & industrial applications
- Garden Irrigation

OPERATING CONDITIONS

- Maximum Fluid Temperature up to +35°C
- Maximum Sand Content: 0.25%
- Minimum well diameter: 4"

MOTOR

- Rewindable motor
- 100% copper wire
- POM Impeller
- Ceramic graphite seal
- 130 V starting efficiency motor
- Single-phase: 220V-240V / 50Hz
- Three-phase: 380V-415V /50Hz
- Equipped with start control box digital auto-control box
- NEMA standards

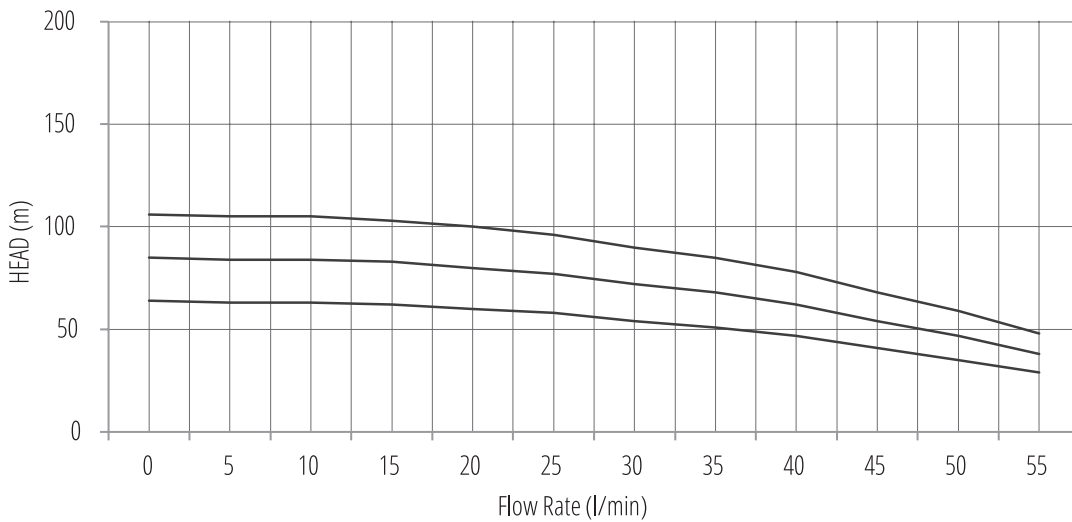

MODEL	KW	HP	DELIVERY													
			L/HOUR	0	300	600	900	1200	1500	1800	2100	2400	2700	300	3300	
			L/MIN	0	5	10	15	20	25	30	35	40	45	50	55	
PAS4AG0209C	0.37	0.5	HEAD (m)	64	63	63	62	60	58	54	51	47	41	35	29	
PAS4AG0212C	0.55	0.75	HEAD (m)	85	84	84	83	80	77	72	68	62	54	47	38	
PAS4AG0215C	0.75	1	HEAD (m)	106	105	105	103	100	96	90	85	78	68	59	48	



COMBO CONTENT

- 100mm Submersible pump | Submersible motor 230V
- Control box 230V | Aluminum base plate | 2 x Compression adaptors
- Ski rope | Submersible cable | Electrical Cable
- Plug Top (3 Point South African Plug)

