

## SELF PRIMING JET PUMPS

PASJET100

**PASCALI**

WATER PUMPS

### APPLICATION

- Clean water without abrasive particles
- Domestic use, irrigation of gardens and allotments
- High head
- Suitable for water lifting, distribution with small or medium pressure sets

### OPERATING CONDITIONS

- Suction lift up to 6 m
- Liquid temperature up to +40°C
- Ambient temperature up to +40°C
- Max. working pressure: 6 bar


### MOTOR

- 2-Pole induction motor
- Single-phase 50 Hz
- 0.75 kW
- Insulation: Class B
- Protection: IP44
- With capacitor and thermal overload protection

### MATERIALS

- Pump body - Cast Iron
- Motor support - Cast Iron
- Impeller - Brass
- Motor shaft - Stainless Steel
- Mechanical seal - Ceramic-Graphite
- 100% Copper winding

FLOW (ℓ/h)	PRESSURE (bar)
4360	0.5
4030	1.5
3480	2.2
3050	2.5
2510	2.7
2000	3.0
1500	3.3
1050	3.6
540	3.9
0	4.2

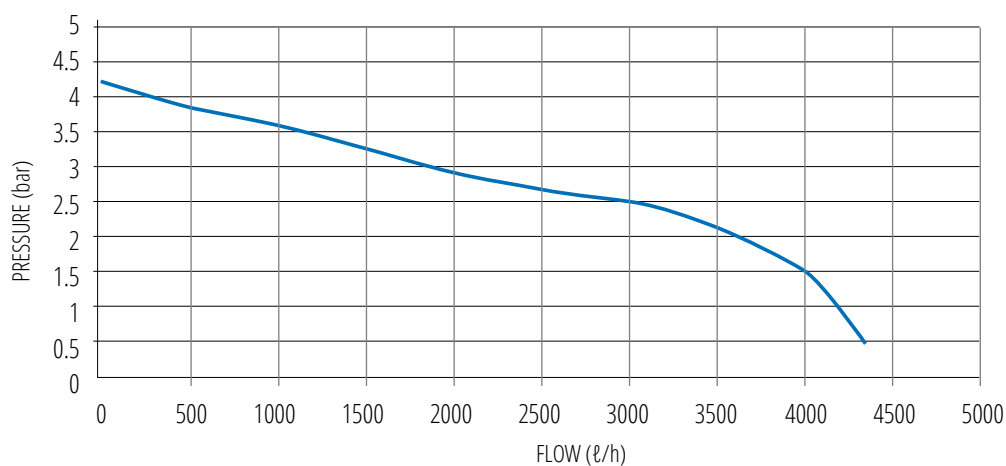

POWER (W)	VOLTAGE (V)	INLET	OUTLET	MAX FLOW (ℓ/h)	MAX HEAD (m)
750	230	1"	1"	4300	42

### SELF PRIMING JET PUMP WITH FLOW CONTROL

PASJETSK

PASCALI self priming jet pump with flow control, for domestic and garden irrigation use. Thermal overload protection, 100% copper winding and brass impeller.



**FLOW SWITCH**  
PASSK10

Max 10 Amps.

*Non return valve included.*

### SELF PRIMING JET PUMP WITH PRESSURE CONTROL

PASJET/24

PASCALI self priming jet pump with pressure control, for domestic and garden irrigation use. Thermal overload protection, 100% copper winding and brass impeller.



**24L TANK**  
PAS24L

Complete steel tank.

*Non return valve included.*