

SUBMERSIBLE MOTORS 230 V



308030 • 308032 • 308033 • 308034 • 308035 • 308036 • 308056

100 mm Rewindable submersible motor for standard applications with maintenance free lubricated bearings and approved non-toxic vegetable oil. Dimensions and flange according to NEMA4"-standards. Matching Stairs control boxes must be installed or a USB control box.

Motor can be installed in a horizontal or vertical position. Motor fitted with a removable lead-out cable. 0.37 kW to 4 kW.

GENERAL SPECIFICATIONS

- Mounting Flange: 4" NEMA Standard
- Insulation Class F
- Protection IP68
- Single-phase Motors: 0.37 kW up to 4.0 kW
- Three-phase Motors: 0.37 kW up to 7.5 kW
- Standard Voltages: 1 ~ 230 V (50 Hz)
3 ~ 230 V or 400 V (50 Hz)
- Cable Length: 1.7 m - 0.37 kW up to 1.5 kW
2.5 m - 2.2 kW up to 7.5 kW


OPERATING PARAMETERS

- Max temperature: 35°C (92°F)
- Max immersion depth: 200 m
- Motor Cooling Flow Rate: 0.2 m / sec
- Axial Thrust: 2000N - 0.37 kW - 1.5 kW
3000N - 2.2 kW
5000N - 3 kW - 7.5 kW

MATERIALS

- Motor Shell - 304 Stainless Steel
- Mechanical Seal - Ceramic/Carbon
- Shaft (0.5 - 3 HP) - 304 Stainless Steel
- Shaft (4 - 10 HP) - 630 Stainless Steel

CODE	H	WEIGHT
	mm	kg
308030	346	7.3
308032	365	8.2
308033	380	8.8
308034	405	10
308035	440	11.5
308036	495	14
308056	683	22.8

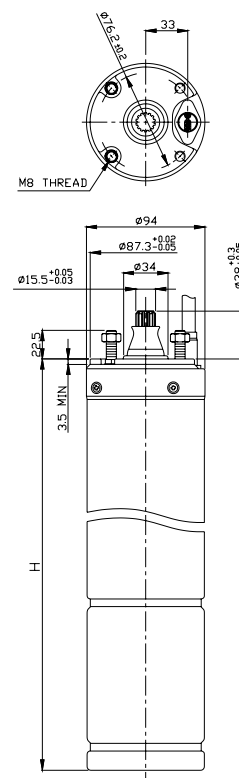

SINGLE-PHASE MOTORS 50 Hz

CODE	P2		VOLT	IN	ISTART	EFFICIENCY	PF	Nn	THRUST LOAD	CAPACITOR	CABLE		H	WEIGHT
	kW	HP	V	A	A	%	COS Φ	RPM	N	μF	mm ²	m	mm	kg
308030	0.37	0.5	230	3.7	12	53	0.90	2840	2000	16	1.5	1.7	346	7.3
308032	0.55	0.75	230	5.0	15	62	0.90	2840	2000	20	1.5	1.7	365	8.2
308033	0.75	1	230	6.2	20	64	0.90	2840	2000	25	1.5	1.7	380	8.8
308034	1.1	1.5	230	8.1	32	68	0.90	2840	2000	35	1.5	1.7	405	10
308035	1.5	2	230	10.4	38	73	0.90	2840	2000	40	1.5	1.7	440	11.5
308036	2.2	3	230	15.0	46	72	0.90	2840	3000	55	1.5	2.5	495	14
308056	4	5.5	230	17.1	84	75	0.90	2840	5000	85	1.5	2.5	683	22.8