

TWIN IMPELLER CENTRIFUGAL PUMP 1.5 kW 230 V

CAWCM2200



APPLICATION

Twin impeller centrifugal water pumps to lift clean water and non-aggressive liquids. The main feature is the two opposite impellers that allow higher lifts than in the single impeller model. The pumps can be used for civil and industrial applications, for water distribution and for irrigation. 100% Copper windings, brass impellers and brass impeller.



OPERATING CONDITIONS


- Max. operating pressure: 8 bar
- Max. ambient temperature: + 40°C
- Liquid temperature up to + 60°C

MOTOR

- Insulation Class B
- Protection IP44
- Single-phase power supply with capacitor permanently activated
- Internal thermal protector
- Speed of rotation: 2850 rpm
- Continuous duty: S1

MATERIALS

- Pump body - Cast Iron
- Impeller - Brass
- Motor shaft - AISI1045
- Mechanical seal - NBR/Graphite/Ceramic

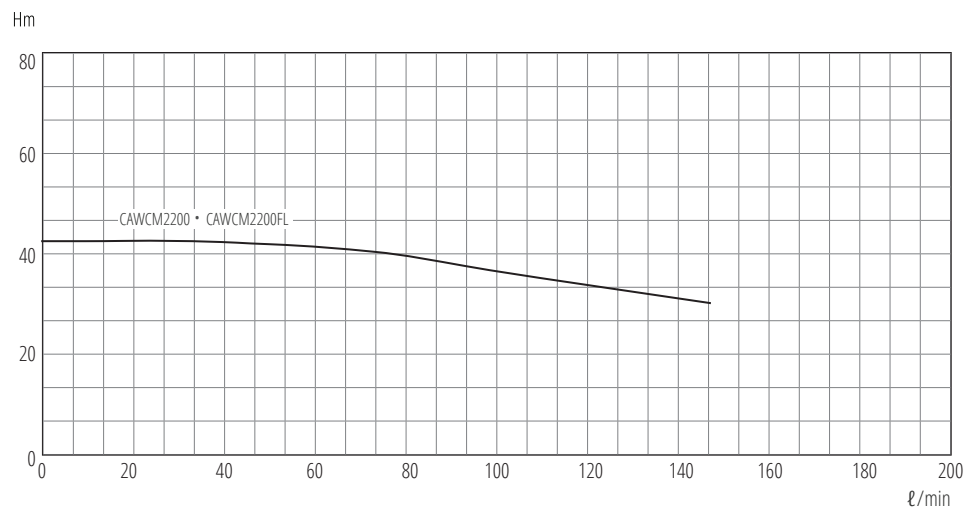

TYPE	NOMINAL POWER		uF	AMPERE	Q l/min	Flow rate (l/min)															
	HP	KW				0	20	40	60	80	90	100	110	120	140	160	200				
CAWCM2200	2	1.5	45	10	H (m)	43	42.5	42	41	40	39	38.5	36.5	34.5	32	-	-				

TWIN IMPELLER CENTRIFUGAL PUMP WITH FLOW CONTROL

CAWCM2200FL



TYPE	L1	W1	H1	L2	L3	DN1	DN2	N.W (kg)	PACKAGE DIMENSION (mm)		
									L	W	H
CAWCM2200	415	205	250	100	73	1.5"	1.25"	24	425	230	265

