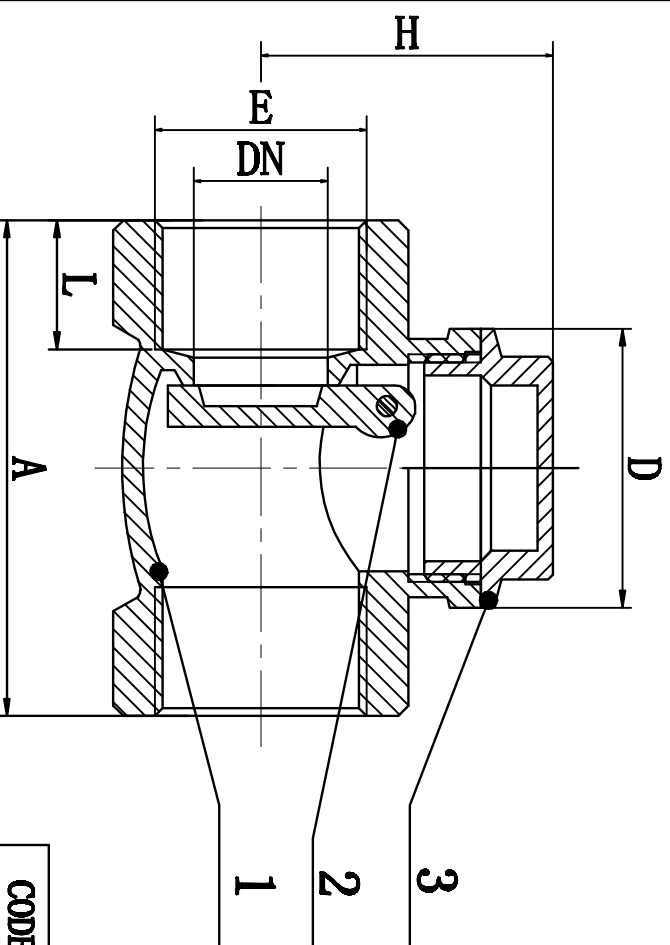


- Specification:**
1. Nominal pressure:1.6MPa;
 2. Working medium: Water, Gas, Oil(Non-corrosive) ;
 3. Working temperature:-10°C to 120 °C;
 4. Thread standard:according to ISO228-1;

3	BONNET	BRASS
2	WEDGE	BRASS
1	BODY	BRASS
NO.	PARTS	MATERIAL

CODE NO.	E	A	H	D	L	SW	DN	WEIGHT/G
425K015	1/2"	47	30.5	27	12.5	24.5	12.5	115
425K020	3/4"	56	36	31	14	31	17.5	180
425K025	1"	63	45	39.5	14	38	22	290
425K032	1-1/4"	72.5	49	47	15.5	47.5	27	490
425K040	1-1/2"	80	52	51.5	15	53.5	31	620
425K050	2"	94	60.5	63.5	16	66	43.5	920
425K065	2-1/2"	102.5	70.5	74	16.5	83.5	53.5	1600
425K080	3"	124	80	89	20	97	62	2400
425K100	4"	160	103	118	26	124	89	4950

TOLERANCES					REMARK:				
L17MM-100MM					1.THE UNIT WEIGHT CAN BE ACCEPTED WITH IN 35%.				
ALL MACHINING MM	±0.2	±0.3	±0.7	±1	2.THE TOLERANCE CAN BE ACCEPTED AS THE SHEET.				
BRASS SWING CHECK VALVE					25MM-100MM				
DATED: MAY 24, 2016									