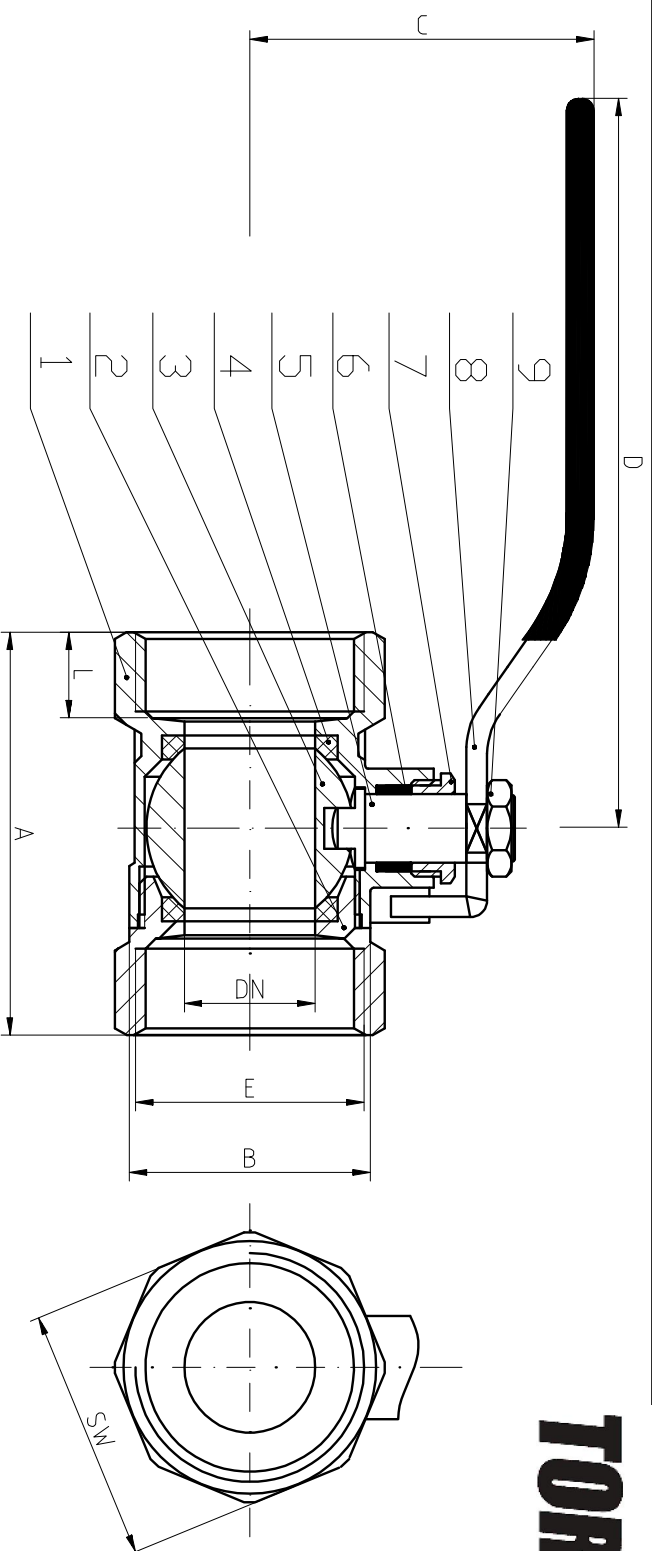


ON) TORRENTI
OFF)

Specifications:
1. Nominal pressure: 1.6 MPa;
2. Working medium: Water, Gas, Oil (non-corrosive);
3. Working temperature: -10°C to 120 °C;
4. Thread standard according to ISO228-1;

E	A	B	C	D	L	Sw	DN	weight	CODE NO.
1/2	47	25.5	46	100	12	24.5	12	160	321015
3/4	52	30.5	50	100	12.5	30.5	15	215	321020
1	59	35	55	112	13.5	37	19	310	321025
1-1/4	68	45	68	140	14.5	46.5	25	545	321032
1-1/2	80	56	76	140	16	53	32	735	321040
2	92	69.5	90	170	18	65.5	40	1130	321050

9	nuts	S.S.
8	handle	iron
7	nuts	brass
6	gasket	PTFE
5	stem	brass
4	O-ring	PTFE
3	ball	brass
2	screw	brass
1	body	brass
NO.	NAME	MATERIAL

REMARK:
1. THE UNIT WEIGHT CAN BE ACCEPTED WITH IN 5%
2. THE TOLERANCE CAN BE ACCEPTED AS THE SHEET.

REDUCED BALL VALVE