


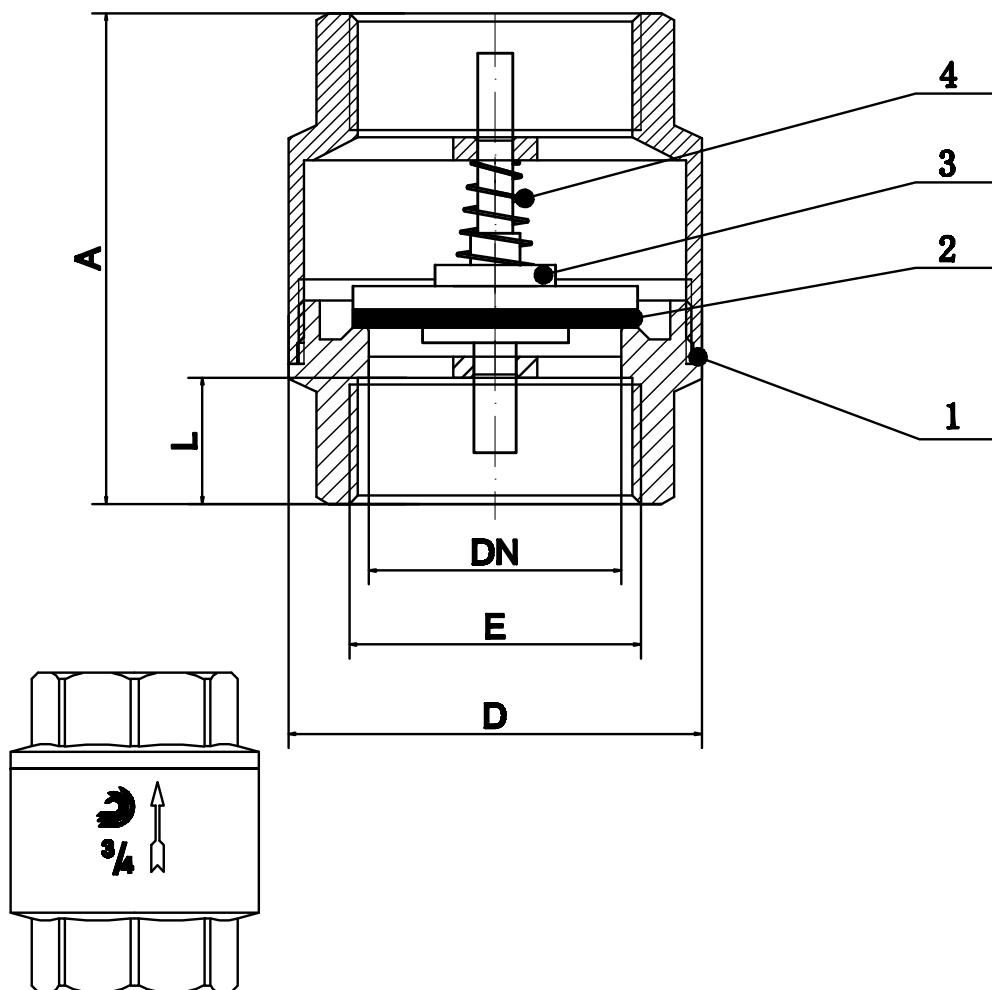

Specification:

1. Nominal pressure: 1.6MPa;
2. Working medium: water;
3. Working temperature: -10°C to 120 °C;
4. Thread standard: according to ISO228-1;

4	SPRING	S.S.
3	INSERT	BRASS
2	GASKET	NBR
1	BODY	BRASS
NO.	PARTS	MATERIAL

CODE NO.	E	A	D	L	DN	WEIGHT/G
426K015	1/2"	45.5	33.2	10	18.5	130
426K020	3/4"	50	39.5	12	24	180
426K025	1"	53	46.7	13	29	250
426K032	1-1/4"	59	58.7	14.5	36	390
426K040	1-1/2"	69.5	67.5	16	44	550
426K050	2"	78	80	17	53	850
426K065	2-1/2"	95	101	20	68	1540
426K080	3"	105	110	25	75	2230
426K100	4"	123	143	26	103	3590

TOLERANCES	1.7000-2.0000					REMARK: 1.THE UNIT WEIGHT CAN BE ACCEPTED WITH IN 40%. 2.THE TOLERANCE CAN BE ACCEPTED AS FOLLOWING SHEET.	SPRING LOADED CHECK VALVE F/F 15MM-100MM DATED: MAY 24, 2016
	>0-50	>50-80	>80-120	>120-200	>200-500		
ALL DIMENSIONS IN	±0.2	±0.3	±0.7	±1	±3		